

REC TWINPEAK & PEAK ENERGY PACKAGING INFORMATION

These packaging specifications are applicable to the following products:

- REC Peak Energy Series
- REC Peak Energy BLK Series
- REC TwinPeak Series
- REC TwinPeak BLK Series
- REC TwinPeak 2 Series
- REC TwinPeak 2 BLK Series
- REC TwinPeak 2 BLK2 Series

PALLET FRONT VIEW (DOUBLE STACKED)




PALLET SIDE VIEW (DOUBLE STACKED)




PALLET STACKING



PANEL IDENTIFICATION

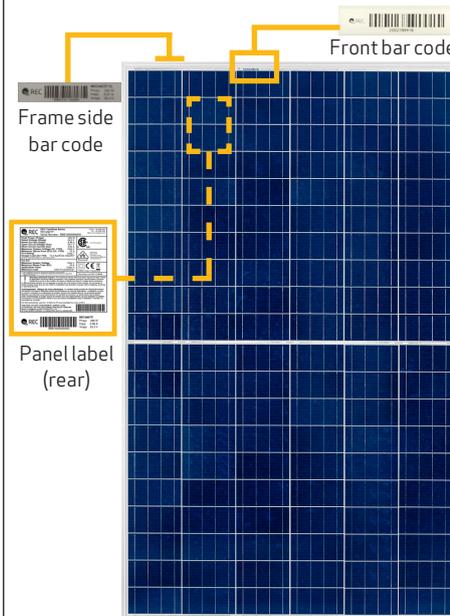

PACKAGING DOCUMENTATION

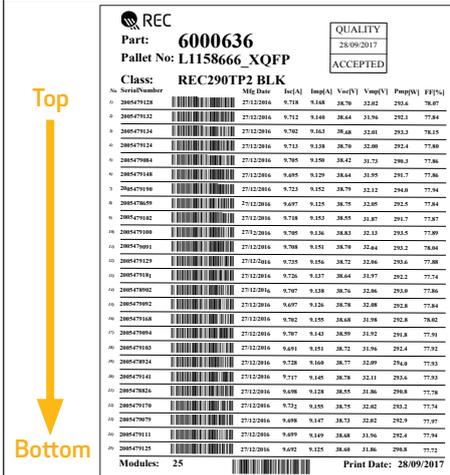

QUALITY

REC performs a quality check on all pallets before and during loading. Vehicles will only be loaded with REC panels if they are deemed safe and serviceable. During transportation, the pallets are stably loaded in protected containers with air bags between pallets to secure them in position. The freight company and driver are responsible for ensuring suitable load safety for each delivery vehicle. Vehicles without suitable load safety measures will not be loaded. REC makes every effort to ensure environmentally-friendly packaging materials are used.

PALLET SHIPMENT DIMENSIONS

Length of pallet:	1712 mm (68 in)
Width of pallet:	1045 mm (41 in)
Height of single pallet stack:	1227 mm (49 in)
Height of double pallet stack:	2454 mm (97 in)
Pallet weight:	40 kg (88 lbs)
Stack weight (pallet + panels):	ca. 500 kg (1100 lbs)

DELIVERY INFORMATION

Panels per pallet:	25
Panels per GP/high cube container (40 ft):	700 (28 pallets)
Panels per 13.6 m truck:	750 (30 pallets)
Panels per 53 ft truck:	900 (36 pallets)

DELIVERY DOCUMENTATION

Flash data list:	On short side
Serial number list:	On short side
Product name:	On long side
Watt class:	On long side

PACKAGING MATERIAL

Pallet:	Wood
Foam pad:	Polyurethane Polyether Polyol
Top cover:	Corrugated cardboard
Edge protectors:	Core board - Kraft
Corner pieces and spacers:	HDPE

STORAGE AND TRANSPORTATION

Stacking for storage:	2 pallets max
Stacking for transportation:	2 pallets max

Note: When double stacking pallets, ensure upper pallet sits securely on edge protector.

Note: Pallets delivered stacked are not bound together.

MINIMUM FORK LENGTHS FOR TRANSPORTATION

		Single/Double stack only
Forklift	Long side	1.2 m (47 in) Loading & unloading of container only
	Short side	1.5 m (59 in)
Pallet jack	Long side	X
	Short side	1.5 m (59 in)

Note: Forks must be spaced a minimum of 500 mm apart. Handlers must ensure that vehicles used for REC pallets can handle the specified load safely.

Note: Specifications subject to change without notice