


# ZXP6-LD60 Series

Znshinesolar 5BB **Light-Weight** Double Glass Poly PV Module



60



Mono **Poly** Solutions

255W | 260W | 265W | 270W | 275W | 280W | 285W | 290W

Made with selected materials and components to grant quality, duration, efficiency and through outputs, the ZXP6-LD60 double glass modules by ZNSHINE SOLAR feature have both decorative and shading functions. They represent the perfect choice for BIPV and BAPV construction applications. This allows you to produce clean energy whilst reducing your energy bill.

ZNSHINE SOLAR'S ZXP6-LD60 double glass solar modules are tested and approved by international acknowledged laboratories, so that we can offer our customers a reliable and price-quality optimized product.

**10 years workmanship warranty**  
**30 years output warranty (polycrystalline): 2.5% in the first year, thereafter 0.5% per year ending with 83% in the 30th year from the Warranty Start Date**

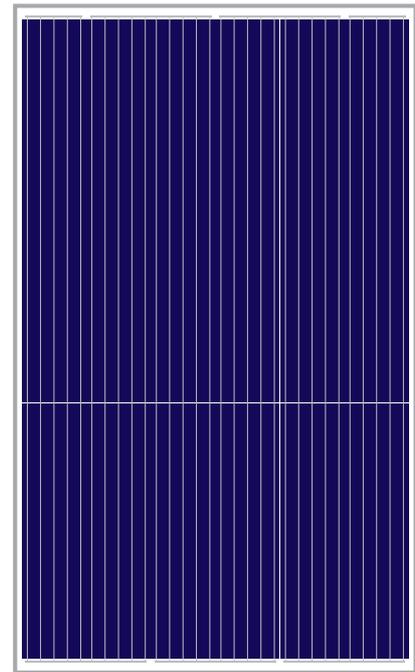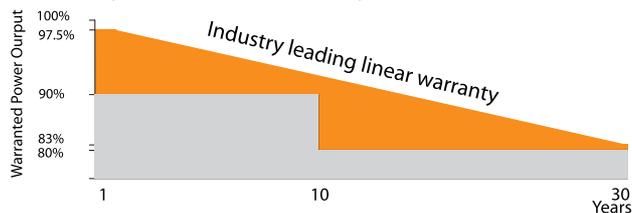

### Innovative PV module

In comparison with common double glass modules, our modules are extremely robust and superior air tightness



### High Efficiency

High module efficiency up to 17.63%  
 Graphene coating can increase about 2W of the module efficiency by rising around 0.5% of the light transmission



### Anti PID

Limited power degradation of ZXP6-LD60 module caused by PID effect is guaranteed under strict testing condition for mass production



### Better Weak Illumination Response

Lower temperature coefficient and wide spectral response, higher power output, even under low-light settings



### Easy to install

The module is very light in weight so the installation is easier and transport costs are lower



### Customerization

We can customize the graphene glass modules with self-cleaning function according to customer requirements  
 Graphene glass modules can increase light transmittance and increase component efficiency



ZNShine PV-Tech Co., LTD, founded in 1988, is a world-leading high-performance PV module manufacturer, PV power station developer, EPC and power station operator. With its state-of-the-art production lines, the company boasts module output of 3.2GW. Bloomberg has listed ZNShine as a global Tier 1 PV manufacturer and Top 10 reliable PV supplier.

[www.znshinesolar.com](http://www.znshinesolar.com)

ELECTRICAL PROPERTIES | STC\*

Module Type	ZXP6-LD60 -255/P	ZXP6-LD60 -260/P	ZXP6-LD60 -265/P	ZXP6-LD60 -270/P	ZXP6-LD60 -275/P	ZXP6-LD60 -280/P	ZXP6-LD60 -285/P	ZXP6-LD60 -290/P
Nominal Power Watt Pmax(W)	255	260	265	270	275	280	285	290
Power Output Tolerance Pmax(%)	0~+3	0~+3	0~+3	0~+3	0~+3	0~+3	0~+3	0~+3
Maximum Power Voltage Vmp(V)	30.4	30.6	30.8	31.0	31.2	31.4	31.6	31.8
Maximum Power Current Imp(A)	8.39	8.50	8.61	8.71	8.82	8.92	9.02	9.12
Open Circuit Voltage Voc(V)	38.0	38.2	38.4	38.6	38.8	39.0	39.2	39.4
Short Circuit Current Ioc(A)	8.79	8.88	8.98	9.07	9.16	9.25	9.34	9.42
Module Efficiency (%)	15.50	15.81	16.11	16.42	16.72	17.02	17.33	17.63

\*STC (Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, AM 1.5  
 \*The data above is for reference only and the actual data is in accordance with the practical testing

ELECTRICAL PROPERTIES | NOCT\*

Maximum Power Pmax(Wp)	188.4	192.2	196.1	199.7	203.8	207.4	211.2	215
Maximum Power Voltage Vmpp(V)	28.4	28.6	28.8	29.0	29.3	29.5	29.7	29.8
Maximum Power Current Imp(A)	6.64	6.72	6.80	6.88	6.96	7.04	7.11	7.21
Open Circuit Voltage Voc(V)	35.0	35.2	35.4	35.6	35.7	35.9	36.1	36.3
Short Circuit Current Isc(A)	7.11	7.19	7.27	7.34	7.42	7.49	7.56	7.63

\*NOCT(Nominal Operating Cell Temperature):Irradiance 800W/m<sup>2</sup>,Ambient Temperature 20°C,AM 1.5,Wind Speed 1m/s  
 \*The data above is for reference only and the actual data is in accordance with the practical testing

TEMPERATURE RATINGS

NOTC	45°C ±2°C
Temperature coefficient of Pmax	-0.408%/K
Temperature coefficient of Voc	-0.31%/K
Temperature coefficient of Isc	0.06%/K

WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C~+85°C
Maximum series fuse	15 A
Maximum load(snow/wind)	5400 Pa / 2400 Pa


MECHANICAL DATA

Solar cells	Poly 156.75×156.75 mm
Cells orientation	60 (6×10)
Module dimension	1658×992×25 mm(With Frame)
Weight	18 kg / 21 kg
Glass	(1.6+1.6mm)/(2.0+2.0mm) heat strengthened glass
Junction box	IP 68, 3 diodes
Cables	4 mm <sup>2</sup> , 350 mm
Connectors	MC4-compatible

PACKAGING INFORMATION

Packing Type	40' HQ
Piece/Box	42
Piece/Container	1176

DIMENSION OF THE PV MODULE (mm)

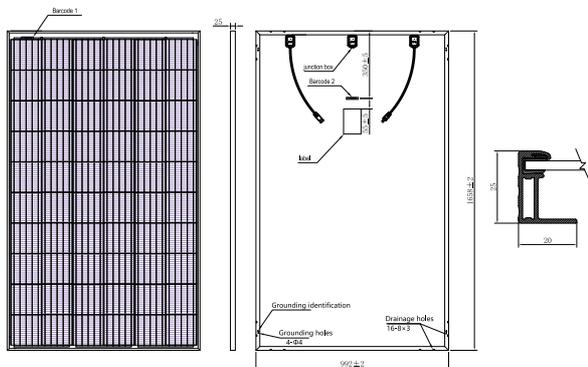

I-V CURVES OF THE PV MODULE

