



Building a better future
Global Leader



• Qualified, IEC 61215
• Safety tested,
IEC 61730
• Periodic inspection



ISO 9001 REGISTERED
DNV DNV Certification B.V., The Netherlands

ISO 14001 REGISTERED
DNV DNV Certification B.V., The Netherlands

Hyundai Solar Module

| SF-Series |

Multi-crystalline Type

HiS-M194SF | HiS-M197SF | HiS-M200SF
HiS-M203SF | HiS-M206SF | HiS-M209SF
HiS-M212SF

Mono-crystalline Type

HiS-S197SF | HiS-S200SF | HiS-S203SF
HiS-S206SF | HiS-S209SF | HiS-S212SF
HiS-S215SF

Mechanical Characteristics

| | |
|---------------|-----------------------------------------------------------------------------------------------------------------------------|
| Dimensions | 983 mm [38.7"] [W] × 1476 mm [58.11"] [L] × 35 mm [1.38"] [H] |
| Weight | Approx. 17.0 kg [37.5 lbs] |
| Solar cells | 54 cells in series [6×9 matrix] |
| Output cables | 4 mm ² [12AWG] cables with polarized weatherproof connectors, IEC certified (UL listed), Length 1.0 m [39.4"] |
| Junction box | IP65, weatherproof, IEC certified (UL listed) |
| Bypass diodes | 3 bypass diodes to prevent power decrease by partial shade |
| Construction | Front : High transmission low-iron tempered glass, 3.2 mm [0.126"] Encapsulant : EVA Back Sheet : Weatherproof film |
| Frame | Clear anodized aluminum alloy type 6063 |

High Quality

- IEC 61215(Ed.2) and IEC 61730 by TÜV Rheinland
- UL listed (UL1703), Class C Fire Rating
- Output power tolerance ±3%
- ISO 9001:2000 and ISO 14001:2004 Certified
- Advanced Mechanical Test (5,400 Pa) Passed (IEC)
/Mechanical Load Test (40 lbs/ft²) Passed (UL)

Limited Warranty

- 5 years for product defect
- 10 years for 90% of warranted min. power
- 25 years for 80% of warranted min. power

Fast and Inexpensive Mounting

- Delivered ready for connection
- Pre-confectioned cables
- IEC (UL) passed and weatherproof connectors
- Integrated bypass diodes



*Important Notice on Warranty

The warranties apply only to the PV modules with Hyundai Heavy Industries Co., Ltd.'s logo (shown left) and product serial number on it.

Electrical Characteristics

| Multi-crystalline Type |

| | | HiS-M□□□SF | | | | | | |
|---------------------------------|-----|------------|-------|------------------------------|-------|-------|-------|-------|
| | | 194 | 197 | 200 | 203 | 206 | 209 | 212 |
| Nominal output (Pmpp) | W | 194 | 197 | 200 | 203 | 206 | 209 | 212 |
| Warranted minimum power | W | 188.2 | 191.1 | 194.0 | 196.9 | 199.8 | 202.7 | 205.6 |
| Voltage at Pmax (Vmpp) | V | 26.2 | 26.4 | 26.4 | 26.6 | 26.8 | 26.9 | 27.0 |
| Current at Pmax (Impp) | A | 7.5 | 7.5 | 7.6 | 7.7 | 7.7 | 7.8 | 7.9 |
| Open circuit voltage (Voc) | V | 32.9 | 33.0 | 33.1 | 33.3 | 33.4 | 33.5 | 33.6 |
| Short circuit current (Isc) | A | 8.1 | 8.1 | 8.2 | 8.2 | 8.2 | 8.3 | 8.3 |
| Output tolerance | % | | | | ±3 | | | |
| No. of cells & connections | pcs | | | 54 in series | | | | |
| Cell type | — | | | 6" Multi-crystalline silicon | | | | |
| Module efficiency | % | 13.4 | 13.6 | 13.8 | 14.0 | 14.2 | 14.4 | 14.6 |
| Temperature coefficient of Pmpp | %/K | -0.43 | -0.43 | -0.43 | -0.43 | -0.43 | -0.43 | -0.43 |
| Temperature coefficient of Voc | %/K | -0.32 | -0.32 | -0.32 | -0.32 | -0.32 | -0.32 | -0.32 |
| Temperature coefficient of Isc | %/K | 0.056 | 0.056 | 0.056 | 0.056 | 0.056 | 0.056 | 0.056 |


※ All data at STC (Standard Test Conditions). Above data may be changed without prior notice.

| Mono-crystalline Type |


| | | HiS-S□□□SF | | | | | | |
|---------------------------------|-----|------------|-------|-----------------------------|-------|-------|-------|-------|
| | | 197 | 200 | 203 | 206 | 209 | 212 | 215 |
| Nominal output (Pmpp) | W | 197 | 200 | 203 | 206 | 209 | 212 | 215 |
| Warranted minimum power | W | 191.1 | 194.0 | 196.9 | 199.8 | 202.7 | 205.6 | 208.6 |
| Voltage at Pmax (Vmpp) | V | 26.4 | 26.5 | 26.6 | 26.8 | 26.9 | 27.0 | 27.1 |
| Current at Pmax (Impp) | A | 7.5 | 7.6 | 7.7 | 7.7 | 7.8 | 7.9 | 8.0 |
| Open circuit voltage (Voc) | V | 33.0 | 33.1 | 33.2 | 33.4 | 33.5 | 33.6 | 33.7 |
| Short circuit current (Isc) | A | 8.2 | 8.2 | 8.2 | 8.2 | 8.2 | 8.3 | 8.3 |
| Output tolerance | % | | | ±3 | | | | |
| No. of cells & connections | pcs | | | 54 in series | | | | |
| Cell type | — | | | 6" Mono-crystalline silicon | | | | |
| Module efficiency | % | 13.6 | 13.8 | 14.0 | 14.2 | 14.4 | 14.6 | 14.8 |
| Temperature coefficient of Pmpp | %/K | -0.44 | -0.44 | -0.44 | -0.44 | -0.44 | -0.44 | -0.44 |
| Temperature coefficient of Voc | %/K | -0.34 | -0.34 | -0.34 | -0.34 | -0.34 | -0.34 | -0.34 |
| Temperature coefficient of Isc | %/K | 0.052 | 0.052 | 0.052 | 0.052 | 0.052 | 0.052 | 0.052 |

※ All data at STC (Standard Test Conditions). Above data may be changed without prior notice.

Module Diagram

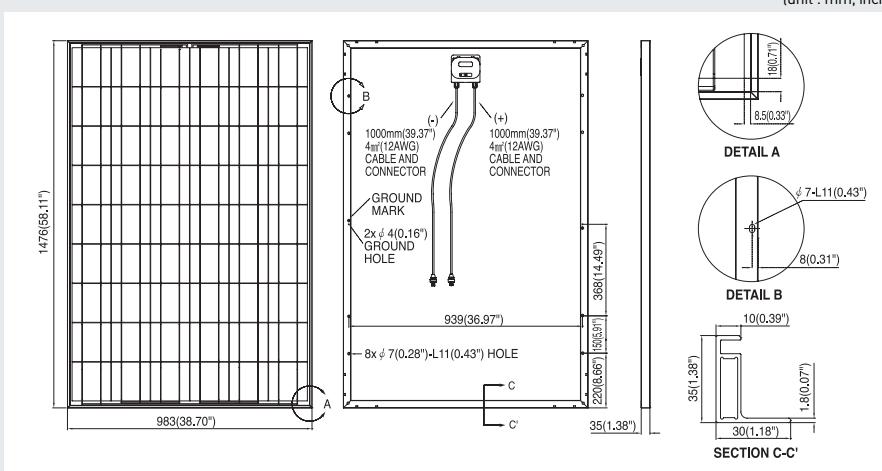

I-V Curves

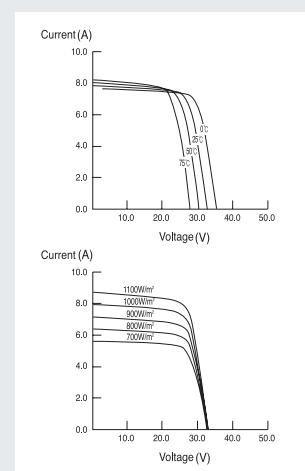

Installation Safety Guide

- Only qualified personnel should install or perform maintenance.
- Be aware of dangerous high DC voltage.
- Do not damage or scratch the rear surface of the module.
- Do not handle or install modules when they are wet.

| | |
|------------------------------------|------------------------------------|
| Nominal Operating Cell Temperature | 46 °C ± 2 |
| Operating Temperature | -40 ~ 85 °C |
| Maximum System Voltage | DC 1,000 V (IEC), DC 600 V (UL) |
| Maximum Reverse Current | 15 A |



Sales & Marketing

140-2, Gye-dong, Jongno-gu, Seoul, Korea
Tel: 82-2-746-7563, 8405, 8406 Fax: 82-2-746-7675