

## YL175Wp, Yingli Solar

Yingli's 175 watt photovoltaic module is designed for large electrical power requirements. With a 25 year warranty, the YL175 has superb durability to withstand rigorous operating conditions. Ideal for grid-connected and remote power systems, the YL175 offers high usable power per square foot of solar array.

- ◆ Solar Cell: High efficiency crystalline solar cell. Even if under the weak light, the solar module can produce maximum power output.
- ◆ Tempered glass: Anti-reflecting coating and high transmission rate glass increase the power output and mechanical strength of solar module.
- ◆ EVA and TPT: Using high quality EVA and TPT to prevent destroying and water.
- ◆ Al frame: Without screw, corner connection. 6 holes on the frame can be installed easily.
- ◆ Junction box: Multi function junction box with water proof.
- ◆ Long lifetime:  $\geq 25$  years; Less power decrease.
- ◆ Good performance of preventing from atrocious weather such as wind and hails.
- ◆ Resisting moisture and etching effectively, not effect by geology.
- ◆ The certificate issued by international authority: ISO Quality Management system, UL, TUV, IEC, CEC.



- World-class Product and Service
- Complete Production Chain
- PV Manufacturer from China

天威英利  
TIANWEI YINGLI

# YL175Wp, Yingli Solar

- World-class Product and Service
- Complete Production Chain
- PV Manufacturer from China

## ELECTRICAL PARAMETER

Module type	175(23)PR1310×990
Cell	Poly-crystal silicon
No. of Cells and Connections	48 in series
Maximum Power (Pm)	175W±3%
Maximum Power Voltage (Vpm)	23.5V
Maximum Power Current (Ipm)	7.5A
Open Circuit Voltage (Voc)	29.5V
Short Circuit Current (Isc)	8.0A
Module Efficiency	13.5%
Cell Efficiency	15.4%

(\* (STC) Standard Test Conditions: 25°C, 1 KW/m<sup>2</sup>, AM 1.5)

## MECHANICAL CHARACTERISTIC

Dimensions (H×W×D)	1310×990×50mm
Weight	15.4Kg(33.9Pound)
Area	1.3m <sup>2</sup>

(Cable Length 900mm provide by clients' requirement)


## TEMPERATURE COEFFICIENTS

Power	T <sub>k</sub> (Wp)	-0.45%/°C
Open Circuit Voltage	T <sub>k</sub> (Voc)	-0.37%/°C
Short Circuit Current	T <sub>k</sub> (Isc)	+0.06%/°C


## ABSOLUTE MAXIMUM LIMITS

Max System Voltage	V	1000
Module Operating Temperature	°C	-45—+85
Wind Velocity	Km/h	130
Noct	°C	46±2


## I V CURVES

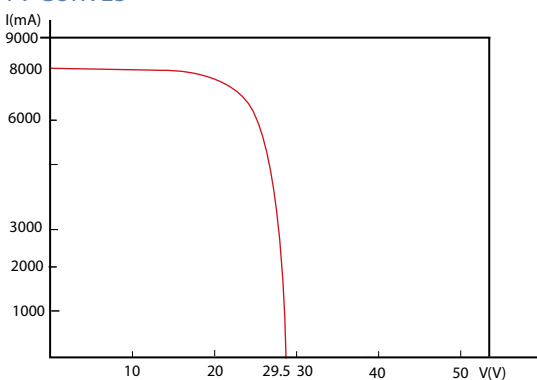


## INSTALLATION DIMENSIONS

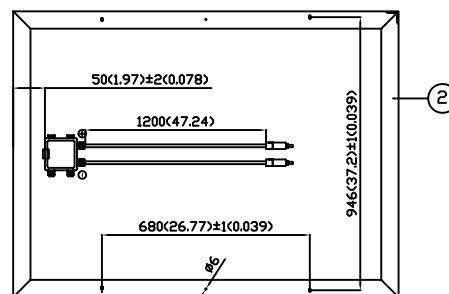


back side

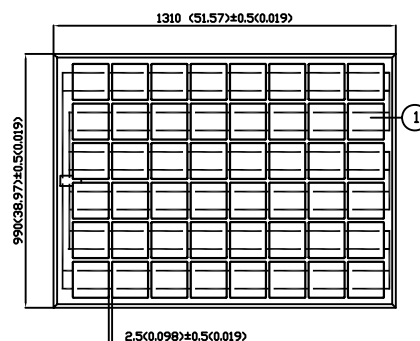

front side



Cell back side

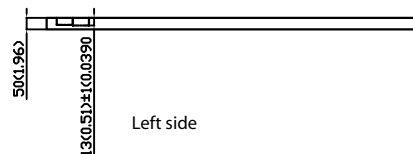

Left side

Certificate	IEC,TUV,UL,CEC			
2	Frame	1310×990	1Set	
1	Cell	156×156	48PCS	
Item	Name	Specification	Quantity	Remark
Brand	Yingli solar		175(23)PR1310×990	

20070824.03.Rev01.E



Baoding Tianwei Yingli New Energy Resources Co., Ltd.

No.3055 Middle Fuxing Road, Baoding China (071051)

Tel: +86(312)8929801 8929700 Fax: +86(312)3151881

E-mail: commerce@yinglisolar.com Http://www.yinglisolar.com